



Felis-D1

Tumble Dryer Controller

It is an economic model with 2 programs designed for industrial drying machines, suitable for heavy industrial conditions. The simplified Custom Desing is an easy-to-use, standard serial controller thanks to its LCD display and membrane keypad. Resistant to vibration and dust. The design of the control panel is customized according to the needs and designed in accordance with the brand according to customer demands.

- Fast commissioning via direct connection.
- Flexible user program support, diagnostic control and large parameter list.
- Suitable for heating / steam heating.
- Suitable for Coin Operated.

Inputs / Outputs

Analog Input	Temperature Sensor Input (-10~100 °C)	1
Digital Input	5-24V AC/DC	4
Digital Output	24V AC/DC 1A Relay NO <i>(Optinonal 220V AC)</i>	4

Programming

Program Count	5 Default Programs	5
---------------	--------------------	---

Felis-D1


Tumble Dryer Controller



Technical Specifications


Operating Voltage	12V AC/DC (Optional 220V AC)
Power Consumption	Max 4W
Operating Temperature	0-60 °C
Operating Humidity	%10 - 85 (Non-Condensing)
Isolation	2000V Digital
Keyboard	8 Keys
Display	45x30 mm Custom Designed LCD
Processor	Micro Processor

Dimensions (mm)

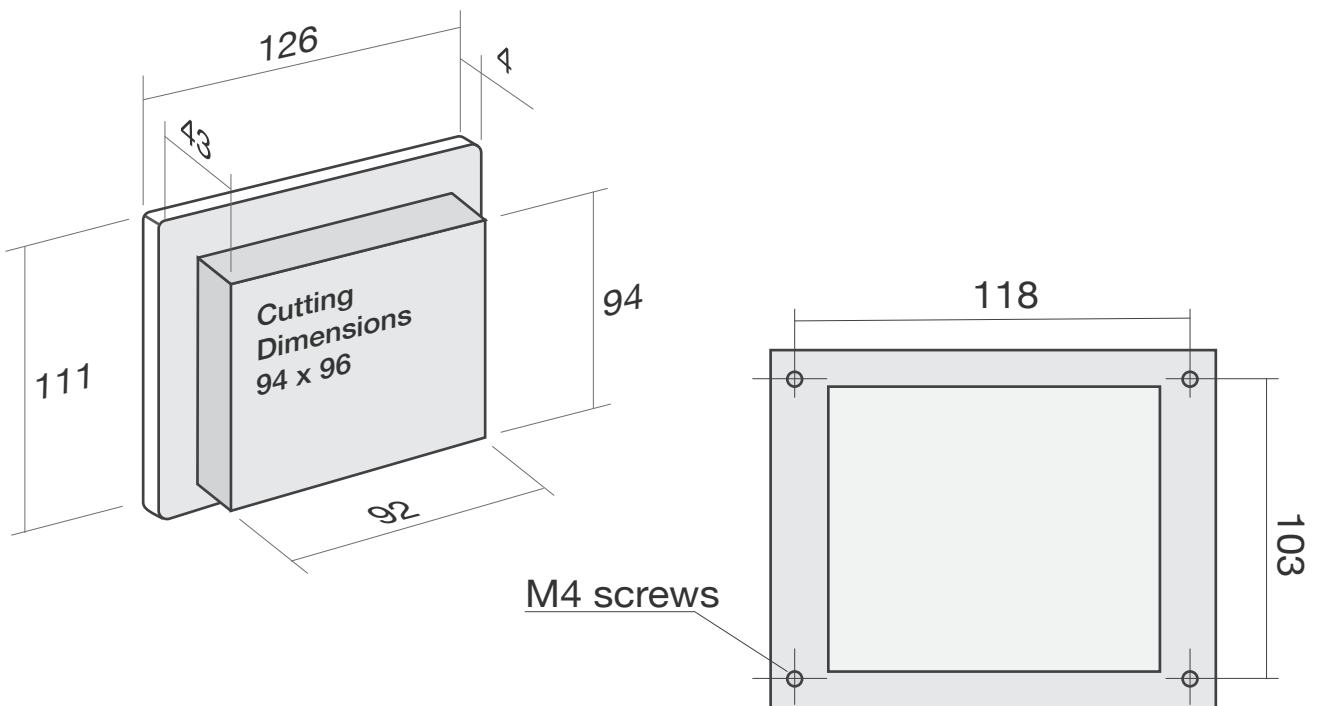

Felis-D1

Tumble Dryer Controller

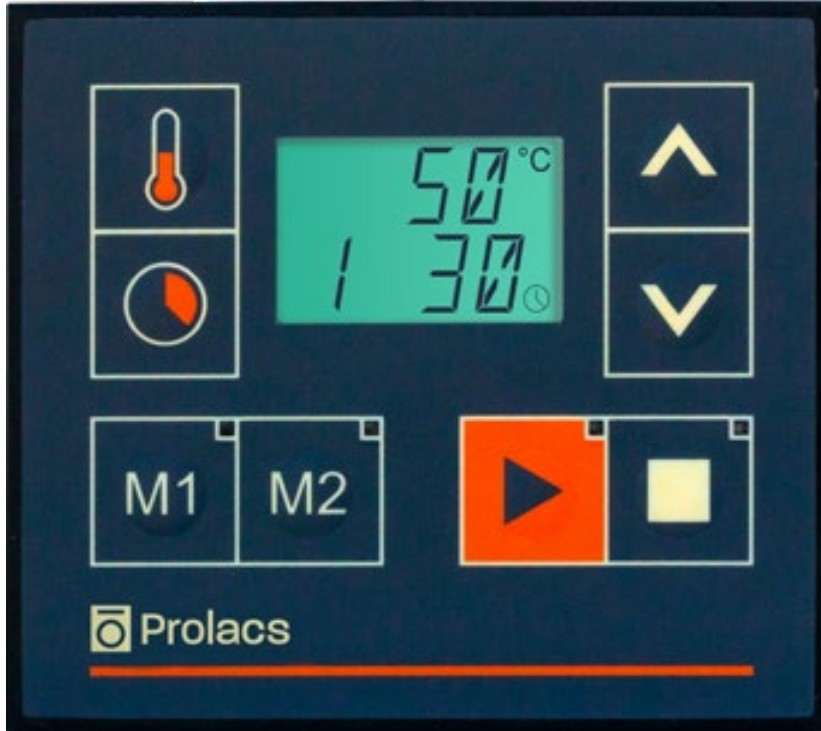

KonzeK Technology can make changes in product specifications without prior notice.